

Mur-lok[®] PVC Inline Ball Valves




Inline Ball Valve Features:

- Exclusive 1/4 turn lever with safety collar
- Materials of Construction: PVC with EPDM seals
- NSF approved wetted materials
- Mur-lok Fittings with dual EPDM o-rings
- Other materials available upon request

Temperatures & Pressures

Pressure	0 - 150 p.s.i.
Temperature	33° - 140°F (1°-60° C)

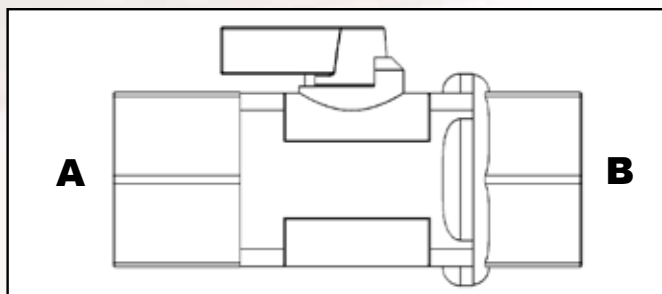

Mur-lok[®] Inline Ball Valves

Item #	Connection A	Connection B	Length	Width
G0400405	1/4" Female NPTF	1/4" Female NPTF	2.51" (63.7 mm)	1.51" (38.3 mm)
G0400415	1/4" Female NPTF	1/4" Male NPTF	2.59" (65.7 mm)	1.51" (38.3 mm)
G0420405	1/4" Mur-lok [®]	1/4" Female NPTF	2.63" (66.8 mm)	1.51" (38.3 mm)
G0420415	1/4" Mur-lok [®]	1/4" Male NPTF	2.65" (67.3 mm)	1.51" (38.3 mm)
G0420425	1/4" Mur-lok [®]	1/4" Mur-lok [®]	2.66" (67.5 mm)	1.51" (38.3 mm)
G0420625	1/4" Mur-lok [®]	3/8" Mur-lok [®]	2.66" (67.5 mm)	1.51" (38.3 mm)
G0600605	3/8" Female NPTF	3/8" Female NPTF	2.54" (64.5 mm)	1.51" (38.3 mm)
G0620405	3/8" Mur-lok [®]	1/4" Female NPTF	2.65" (67.3 mm)	1.51" (38.3 mm)
G0620415	3/8" Mur-lok [®]	1/4" Male NPTF	2.65" (67.3 mm)	1.51" (38.3 mm)
G0620605	3/8" Mur-lok [®]	3/8" Female NPTF	2.65" (67.3 mm)	1.51" (38.3 mm)
G0620615	3/8" Mur-lok [®]	3/8" Male NPTF	2.65" (67.3 mm)	1.51" (38.3 mm)
G0620625	3/8" Mur-lok [®]	3/8" Mur-lok [®]	2.65" (67.3 mm)	1.51" (38.3 mm)
G0820825	1/2" Mur-lok [®]	1/2" Mur-lok [®]	2.85" (72.4 mm)	1.51" (38.3 mm)

G.A. Murdock, Inc.

Phone: 800-568-7565 or 605-256-9632
 Fax: 800-568-4301 or 605-256-9682
 Web: www.gamurdock.com
 Email: sales@gamurdock.com